
5000-3CT

Değişken Uçlu Torkmetre
Insert Square Torque Wrench



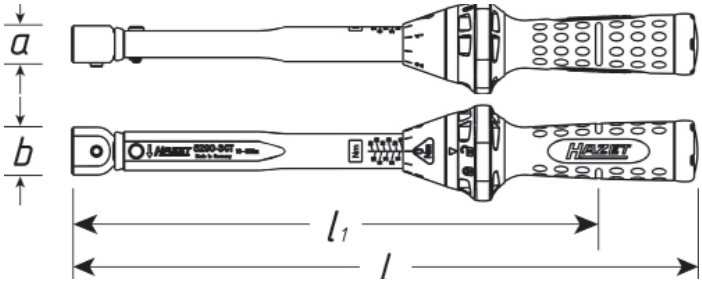

- 2,5–320 N·m aralığında 5 farklı model
- Sıkma yönünde ±%3 tork hassasiyeti
- 9x12 mm ve 14x18 mm değişken uç bağlantısı
- Cırcır, açık ağız ve yıldız uçlarla uyumlu
- Sesli ve hissedilebilir klik tipi uyarı
- Ergonomik, kilitlenebilir tork ayar kabzası
- Lazer işaretlemeli, okunaklı tork skalası
- DIN EN ISO 6789-2:2017 standardına uygun
- Otomotiv ve endüstriyel kullanıma uygun
- HAZET fabrika kalibrasyon belgeli
- TÜRKAK akredite kalibrasyon opsiyonel
- Menşei Almanya, üretici HAZET
- Teknik destek Surkon tarafından sağlanır

- 5 models covering 2.5–320 Nm
- Torque accuracy ±3% clockwise
- 9x12 mm and 14x18 mm insert connections
- Compatible with ratchet and spanner heads
- Audible and tactile click-type indication
- Ergonomic handle with torque locking
- Easy-to-read, laser-marked torque scale
- Compliant with DIN EN ISO 6789-2:2017
- Suitable for automotive and industrial use
- Supplied with factory calibration certificate
- Accredited calibration available on request
- Origin the Germany, manufactured by Hazet

Model	Tork Aralığı *Torque Range*	Uç Girişi *F Drive*	Hassasiyet *Accurancy*	Ölçek *Resolution*	L1	L	a	b	Kuvvet *Force*
#	N.m	mm	%	N.m	mm	mm	mm	mm	kg
5280- 3CT	2.5 - 25	9 x 12	3	0.25	172	218	17	22	1.3 - 14.3
5290 - 3CT	10 - 60	9 x 12	3	0.5	245	291	17	22	3.7 - 23.4
5291 - 3CT	20 - 120	14 x 18	3	1	322	395	23	30	5.6 – 35.3
5292 - 3CT	40 - 200	14 x 18	3	1	442	484	23	30	8.9 - 46.6
5293 - 3CT	60 - 320	14 x 18	3	2	531	594	23	30	10.7 – 59.2

Aksesuarlar / *Accessories*



6606



6404 - 1



6450D



6612C