



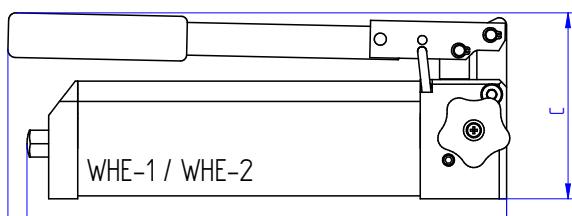

## Çift Hızlı Hidrolik El Pompaları [Standart Debi] Double Speed Hydraulic Hand Pumps [Standard Flow]

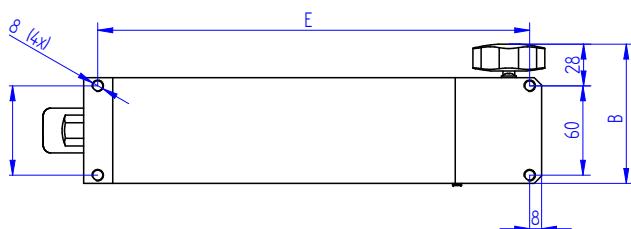

- » Çalışma basıncı 700 bar
- » Çift hızlı hidrolik sistem
- » 1000 bar Ø 63 mm manometre
- » Yağ kapasite aralığı 0,5 – 4,5 litre
- » 700 barda pompalama debisi 1.7 cm<sup>3</sup>
- » Dahili basınç emniyet valf donanımlı
- » Basınç 700 bar üzerine çıkmaz
- » Yağ çıkış portu 3/8" NPT dişi
- » WSV-4/3 ile çift etkili kullanım imkanı
- » Komple alüminyumdan mamuldür
- » Menşei Almanya, üretici Weitner GmbH
- » Teknik destek Surkon tarafından sağlanır

- » Working pressure 700 bar
- » Double speed hydraulic system
- » Delivered with pressure gauge
- » Oil capacity range 0,5 to 4,5 ltr
- » Oil flow each stroke up to 1.7 cm<sup>3</sup>
- » Equipped with built-in safety valve
- » Pressure does not exceed 700 bar
- » Body and tank made in aluminum
- » Double acting use with WSV-4/3
- » Oil pressure output port 3/8" NPTF
- » Lightweight, ergonomic and durable
- » Made in Germany by W. Weitner Co.

Model	Yağ Miktarı Useable Oil	Debi Oil Flow	Yağ Deplasmanı Pres. Rating Stage	Kol Kuvveti Handle Effort	Yağ Çıkışı Oil Port	Ağırlık Weight	Ölçüler / Sizes (AxBxC)
#	cm <sup>3</sup>	cm <sup>3</sup>	bar	kg	NPT	Kg	mm
WH-1	500	7.2 - 0.9	20 - 700	35	3/8" F	4.3	353x150x171
WH-2	900	17 - 1.7	20 - 700	47	3/8" F	5.3	564x150x171
WH-3	2000	18 - 1.7	20 - 700	47	3/8" F	7.5	588x186x175
WH-4	4500	19 - 1.7	20 - 700	47	3/8" F	10.5	588x186x175

Aksesuarlar / Accessories

Silindir Seti Uygulaması  
Cylinder Set ApplicationWSV 4/3  
Yönlendirme Valfi  
Directional valveHortum  
Hose[www.surkon.com.tr](http://www.surkon.com.tr)