

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©





D

C

B

A

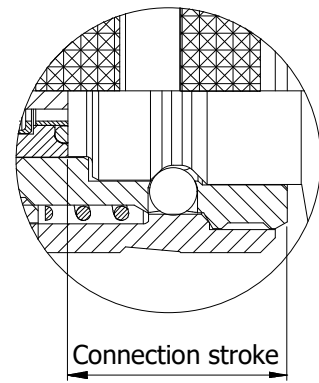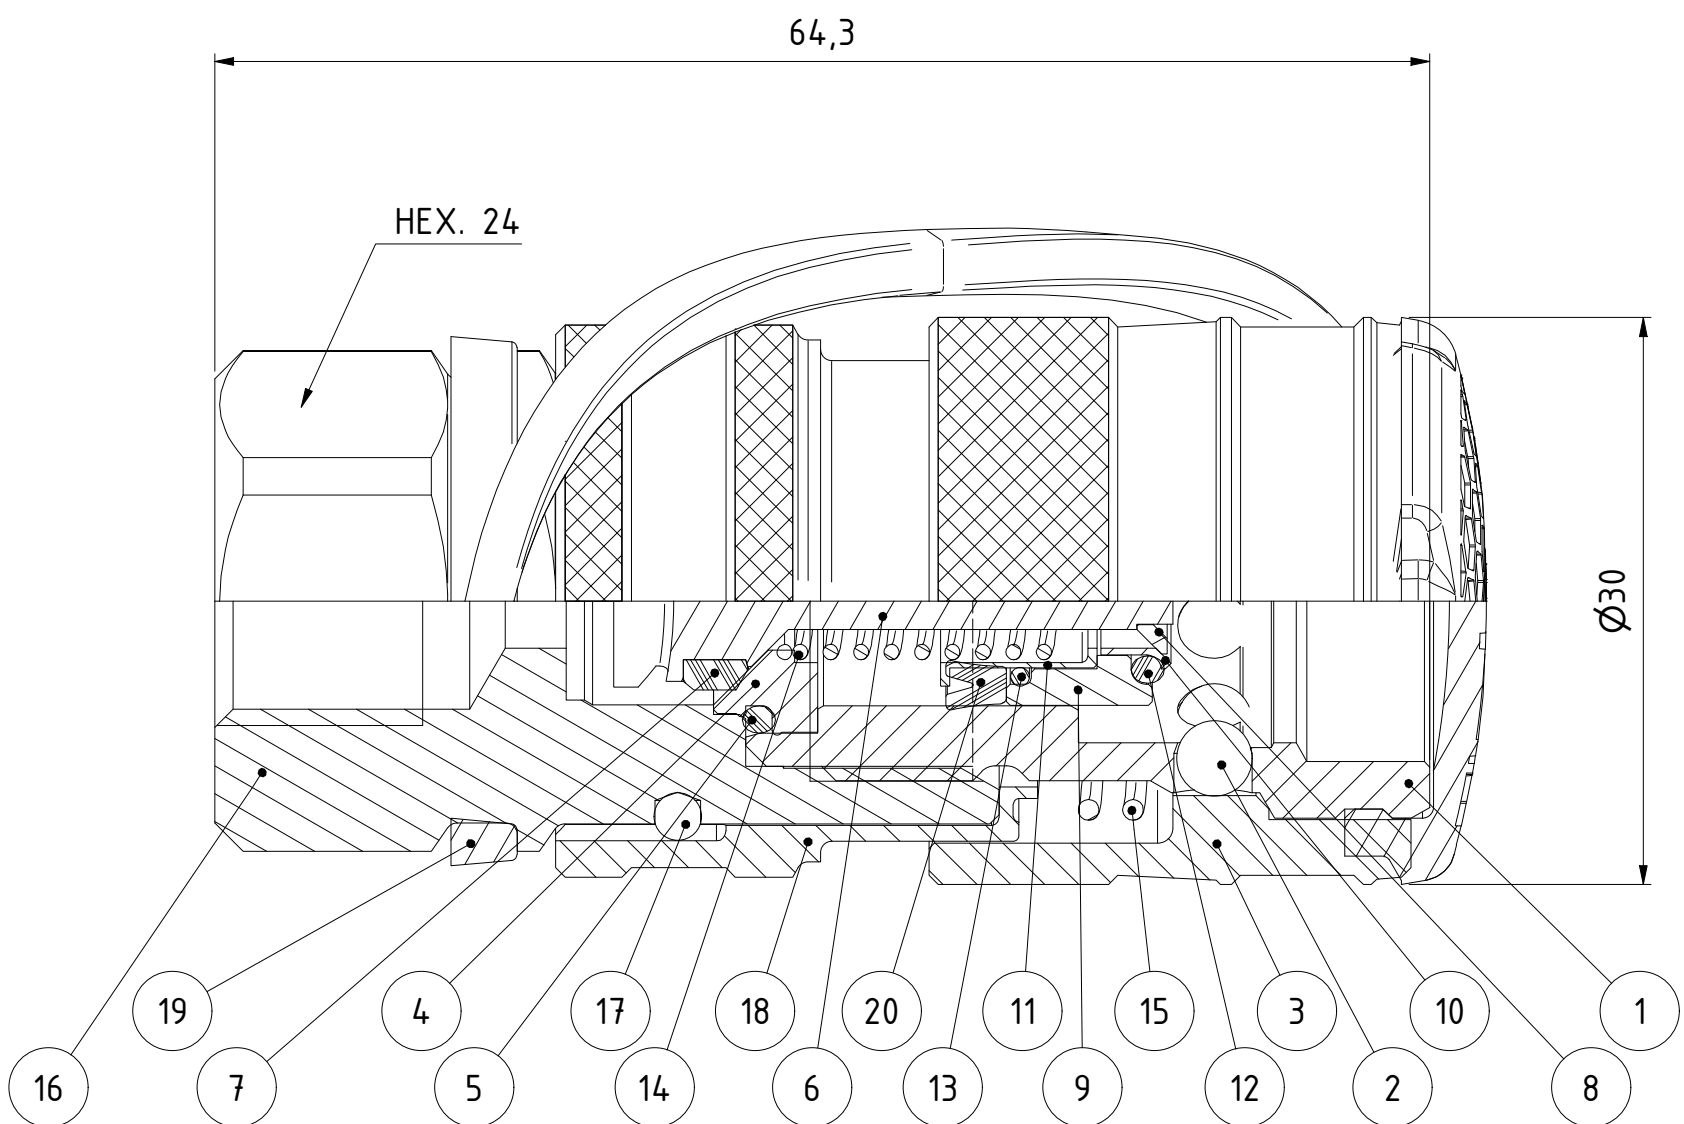

Quick action safety lock



1 : 1

20	1	Lip seal	NBR 80°±3° Shore (mtrl code N80/127)
19	1	Dust Cap	TPE, black
18	1	Sleeve	Steel, Zn-Ni 9 transp.
17	2	Ball	Stainless steel
16	1	Back part	Steel, Zn-Ni 10 black
15	1	Spring	Stainless steel
14	1	Spring	Steel
13	1	O-ring	NBR
12	1	O-ring	NBR
11	1	Spring housing	Steel
10	1	O-ring sleeve	Steel
9	1	Expansion sleeve	Plastic
8	1	Washer	Steel
7	1	Seal	NBR
6	1	Valve	Steel, FeZn5
5	1	O-ring	NBR
4	1	Valve seat	Steel
3	1	Locking sleeve	Hard.steel,Zn-Ni 9 transp
2	9	Ball	Stainless steel
1	1	Front part	Steel, Zn 8 black
Item	Qty	Description	Material

Product No.	101251203
Nominal flow Ø DN:	2.5 mm
Connection Stroke:	20.2 mm
Max WP Connected:	2500 bar
Max WP Disconnected:	2500 bar
Min BP Connected:	5000 bar
Min BP Disconnected:	5000 bar
Max. number of pressure cycles:	10 000
Temperature range:	-30°C - +100°C
Connection:	G 1/4" Fem
Sealing material:	NBR
Hexagon:	24

State Production	Drawn CABAO	Checked FR	Approved JE	Date 2018-04-19
Coupling G 1/4" fem NBR - new version MWP 250 MPa		ECO 12061	Former No.	Scale 2,5 : 1
		Drawing No. 101251203	Issue D	Sheet 1 /(1)