


This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©

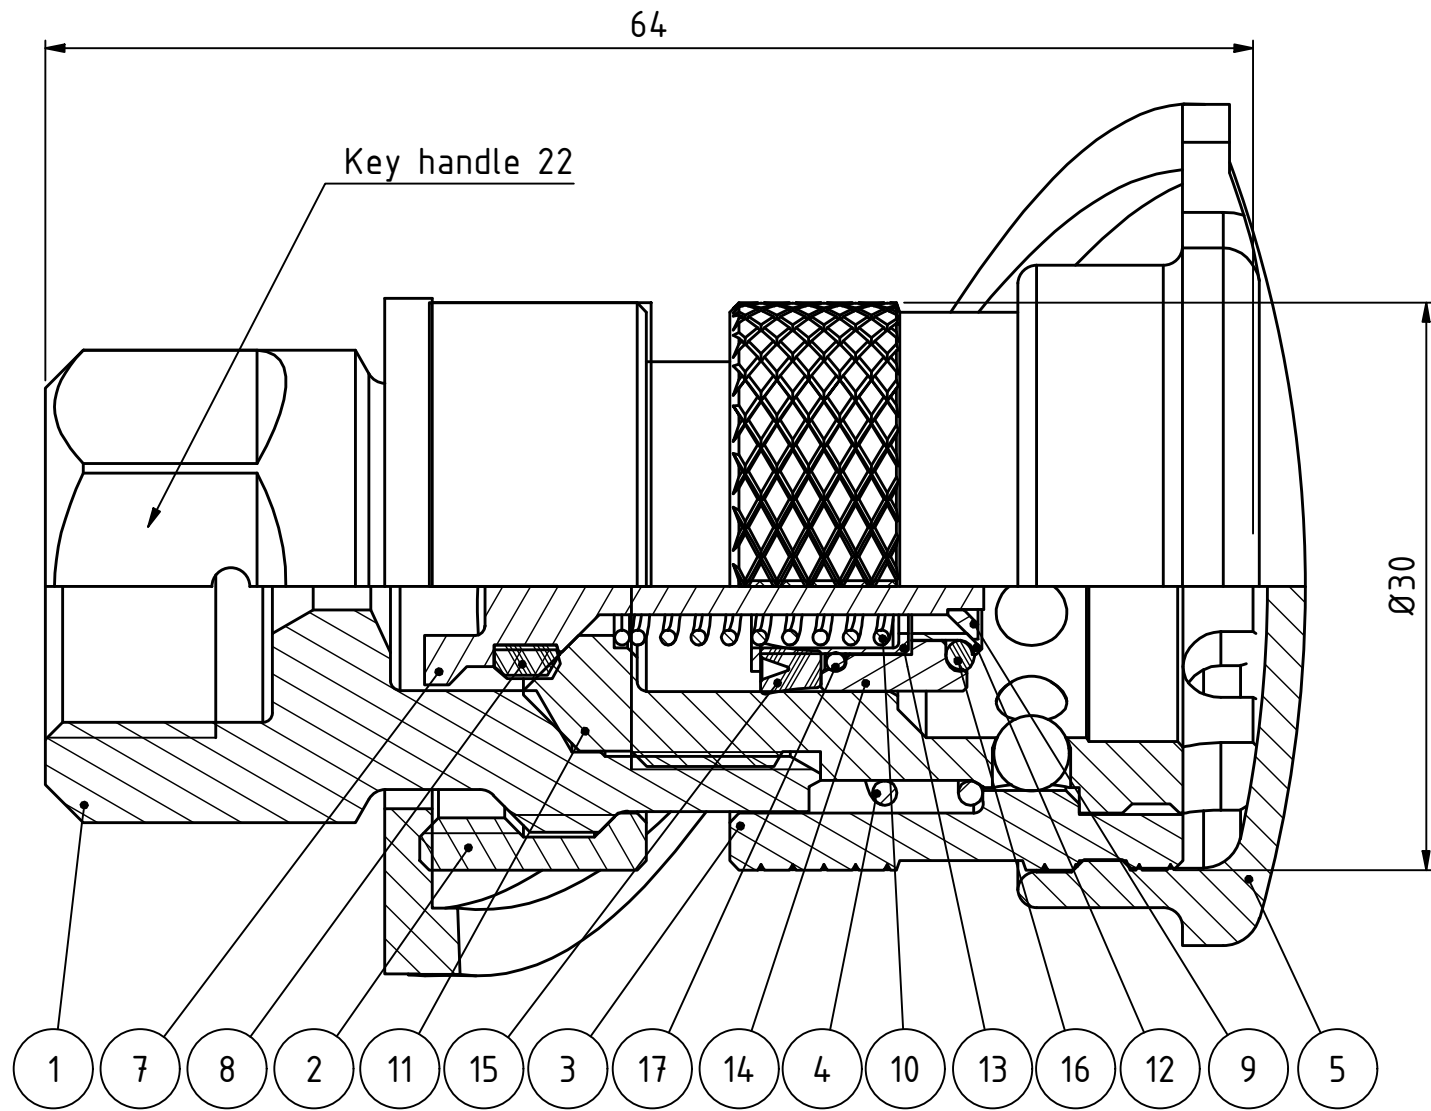

1 : 1

Product No. 101351505	
Nominal flow Ø DN:	2.5 mm
Connection Stroke:	20.6 mm
Max WP Connected:	3000 bar
Max WP Disconnected:	3000 bar
Min BP Connected:	6000 bar
Min BP Disconnected:	6000 bar
Max no. of pressure cycles:	1000 to swiveling nipple 5000 to non swiveling nipple
Temperature range:	-20°C - +80°C
Connection:	M16x1.5 Fem. 60° sealing cone
Sealing material:	NBR
Hexagon:	22

17	1	O-ring	NBR
16	1	O-ring	NBR
15	1	Lip seal	NBR
14	1	Expansion sleeve	Plastic
13	1	Spring housing	Steel
12	1	O-ring sleeve	Steel
11	1	Front part	Steel, Black finished
10	1	Spring	Steel
9	1	Washer	Steel
8	1	Seal	NBR
7	1	Valve	Steel, FeZn5
6	9	Ball	Stainless steel
5	1	Dust cap	Plastic
4	1	Spring	Stainless steel
3	1	Locking sleeve	Hard. steel, Zn 8 silver
2	1	Locking ring	Steel, Zn 8 Silver
1	1	Back part	Steel, black finished
Item	Qty	Description	Material
		Scale 5:2	Drawn CABAO
		Checked FR	Appr. JE
		ECO 11609	Date 2017-11-20
		Drawing No.	Issue B
		Sheet 1/(1)	
Assembly Drawing 101351505			