


Çift Etkili Hidrolik Kriko [10 - 1500 Ton] Double-Acting Hydraulic Jack

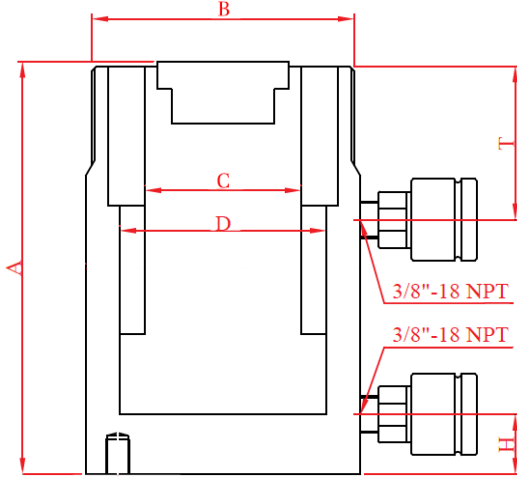

- » Kapasite aralığı 10-1500 ton
- » Silindir kurs aralığı 50-400 mm
- » DWZ serisi çift etkili hidrolik sistem
- » Çalışma basıncı 700 bar maksimum
- » El pompası veya ünite ile birlikte kullanılır
- » Yüksek tonaj itme işlemleri için uygun
- » Dönüş hattı emniyet valfli donanımlı
- » Yatay, dikey, her yöne kullanım imkanı
- » Çoklu senkron kaldırmaya uygun yapı
- » Ağır çalışma şartlarına uygun tasarım
- » Müşteriye özel tasarım özel imalat
- » Servis ve yedek parça hizmeti sağlanır

- » Capacity range from 10 up to 1500 tons
- » Cylinder stroke from 50 up to 400 mm
- » DWZ Series double acting hydraulic jack
- » Maximum working pressure 700 bar
- » Operates with a hand pump or power unit
- » For high-tonnage pushing pulling operations
- » Usable horizontally, vertically, and in all directions
- » Equipped with return line safety valve
- » 3/8" NPT threaded coupling connection
- » Engineered for heavy-duty working conditions
- » Compatible with all brands of hydraulic pumps
- » Custom design and manufacturing available

Model	Kapasite Capacity	Strok Stroke	Etki Alanı Effective Area	Yağ Hacmi Oil Capacity	A	B	C	D	H	T	Ağırlık Weight
#	ton	mm	cm ²	cm ³	mm						kg
DWZ010150	11	150	15,9	238	295	60	30	45	19	55	5
DWZ010250	11	250	15,9	397	395	60	30	45	19	55	6,5
DWZ010300	11	300	15,9	477	445	60	30	45	19	55	7,2
DWZ010350	11	350	15,9	556	495	60	30	45	19	55	8
DWZ020150	23	150	33,2	498	295	90	45	65	20	65	11,8
DWZ020250	23	250	33,2	830	395	90	45	65	20	65	15,5
DWZ030100	30	100	44,2	442	255	100	55	75	27	62	13
DWZ030200	30	200	44,2	884	355	100	55	75	27	62	17,5
DWZ030250	30	250	44,2	1104	420	100	55	75	27	67	20,6
DWZ030300	30	300	44,2	1325	470	100	55	75	27	67	23
DWZ050150	55	150	78,5	1178	315	135	75	100	27	67	29,5
DWZ050200	55	200	78,5	1570	370	135	75	100	27	67	34,3
DWZ050250	55	250	78,5	1963	425	135	75	100	27	67	39
DWZ050300	55	300	78,5	2355	475	135	75	100	27	67	43,3
DWZ100100	100	100	153,9	1539	295	185	110	140	37	80	53,2
DWZ100150	100	150	153,9	2308	345	185	110	140	37	80	61,4
DWZ100200	100	200	153,9	3078	400	185	110	140	37	80	70,6
DWZ150150	150	150	226,9	3406	370	225	130	170	47	90	98,5
DWZ150200	150	200	226,9	4538	420	225	130	170	47	90	110,3
DWZ150250	150	250	226,9	5672	490	225	130	170	47	95	128,2
DWZ150015	1500	150	2163	32455	600	695	435	525	#	#	1149
DWZ1500400	1500	400	2163	86546	870	695	435	525	#	#	2340