EP P40
Pneumatic Hand Test Pump

- **Pressure Range: 0 … 40 bar**
- **Medium: Air**
- **Simple Operation**
- **Mobile and independent**
- **Fine Adjustment**

europascal GmbH
63456 Hanau
Tel.: + 49 (0) 6181 / 42 30 9 0
Fax: + 49 (0) 6181 / 42 30 9 22
service@europascal.de
http://www.europascal.de

Specifications

Pressure Range		
Vakuum	-0.95 bar	-14 psi
Positive Pressure	40 bar	580 psi
Dimensions	approx. 240 x 170 x 50 cm	approx. 9.45 x 6.69 x 1.97 in
Weight	approx. 1.1 kg	approx. 2.43 lbs
Connections		
Reference Instrument	G ¼	
Test device	G ¼ with quick coupling and pressure hose (1 m)	

Fine Adjustment

For precise setting in the low mbar range a large-volume regulating valve with ultrafine thread pitch is used, allowing settings in low pressure ranges.

Hand Pump with Complete Case

In the case all standard connection threads are available in either inch, conical or metric adapters.The appropriate seal kit is also included in the scope of supply. The transport case with shaped foam material insert contains the complete equipment.

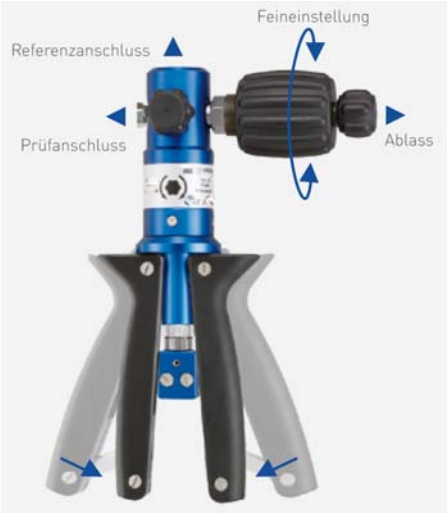

Case – complete		
Adapter Set	Chrome-plated brass	
Seal Kit	PA-Seals and O-rings	
Dimensions	approx. 450 x 370 x 110 mm	approx. 17.72 x 14.57 x 4.33 in
Weight	approx. 4.2 kg	approx. 9.26 lbs

europascal GmbH
63456 Hanau
Tel.: + 49 (0) 6181 / 42 30 9 0
Fax: + 49 (0) 6181 / 42 30 9 22
service@europascal.de
http://www.europascal.de