




Hazet Değişken Uçlu Tork Anahtarları - [2 – 500 N.m]

Hazet Changeable Drive Torque Wrenches - Accuracy ±2%

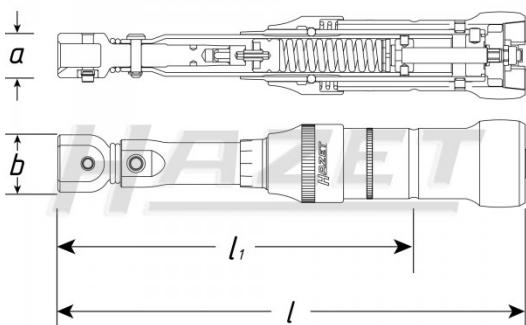

- » Sıkma yönündeki hassasiyet ±2%
- » **2 – 500 Nm** aralığında 10 farklı model
- » ISO 6789-2:2017 standartına uygun yapı
- » Değişken ucu 9x12 ve 14x18 mm girişli
- » Sesli ve farkedilebilir tork erişim uyarı sistemi
- » Ergonomik tasarımlı tutma ve tork ayar kabzası
- » Hafif ve ağır endüstri kullanıma elverişli tasarım
- » Kolay değiştirilebilir kilitli uç mekanizma
- » Hazet fabrika kalibrasyon belgesi ile sevk edilir
- » TÜRKAK akredite kalibrasyon hizmeti opsiyoneldir
- » Türkiye'de, servis yedek parça ve kalibrasyon desteği

- » Accuracy ±2% of scale value
- » 2 - 500 Nm range covered by 10 models
- » Tested in accordance with ISO 6789-2:2017
- » Interchangeable inserts 9x12 or 14x18mm
- » Durable for tightening and loosening operations
- » Torque release palpable and audible "click" sound
- » Designed for automotiv workshop applications
- » Easy replacable and fixable insert mechanism
- » Supplied with House calibration certificate
- » Delivered in protecting plastic safe box

Ayarlanabilir 9x12 mm Değişken Uçlu Tork Anahtarları [2-120 N.m]

Adjustable 9x12 mm Female Handle Torque Wrenches [2-120 N.m]

Parça Part	Tork Aralığı Range	Sürücü Drive	Hassasiyet Accuracy	Kuvvet* Force*	Uzunluk (mm) Length			Ağırlık Weight
#	N.m	mm	%	kg	a	b	l	kg
6280-1CT	2-10	9x12	± %2	1.3-1.6	17	22	181	0.32
6282-1CT	4-40	9x12	± %2	1.9-19.8	17	22	240	0.38
6281-2CT	5-13	9x12	± %4	4.4-11.8	17	22	125.4	0.23
6290-1CT	5-60	9x12	± %2	1.8-23.1	17	22	*	*
6291-2CT	20-120	9x12	± %2	5.9-36.6	18	23	389	0.85

Ayarlanabilir 14x18 mm Değişken Uçlu Tork Anahtarları [20-500 N.m]

Adjustable 14x18 mm Female Handle Torque Wrenches [20-500 N.m]

Parça Part	Tork Aralığı Range	Sürücü Drive	Hassasiyet Accuracy	Kuvvet* Force*	Uzunluk (mm) Length			Ağırlık Weight
#	N.m	mm	%	kg	a	b	l	kg
6291-1CT	20-120	14x18	± %2	5.5-34.5	23	30	401	0.89
6292-1CT	40-200	14x18	± %2	8.5-44.8	23	30	511	1.05
6293-1CT	60-320	14x18	± %2	10.3-56.8	23	30	625	1.25
6294-1CT	100-400	14x18	± %2	14.7-59.9	*	35.5	718	2.73
6295-1CT	200-500	14x18	± %2	21.8-55.1	*	35.5	962	4.32

*Torkmetreyi kullanırken uygulanan maksimum ve minimum kuvveti temsil eder/ Actuating force minimum and maximum value

