


JHB series hydraulic torque wrench



Products Feature

1. JHB series wrench using aerospace material (Al-Ti alloy), durable and reliable.
2. 360°×180° rotating swivel heads.
3. No space limiting in the particular application.
4. Pushing the driveshaft directly, simply and quickly.
5. High accuracy: ± 3%.
6. Can be equipped with large sleeves (A/B/C/D/E/F-type) and long sleeves in order to adapt to different situations.
7. Super torque achieving, reaching 180,000Nm or greater.
8. It can be customized according to special requirements.

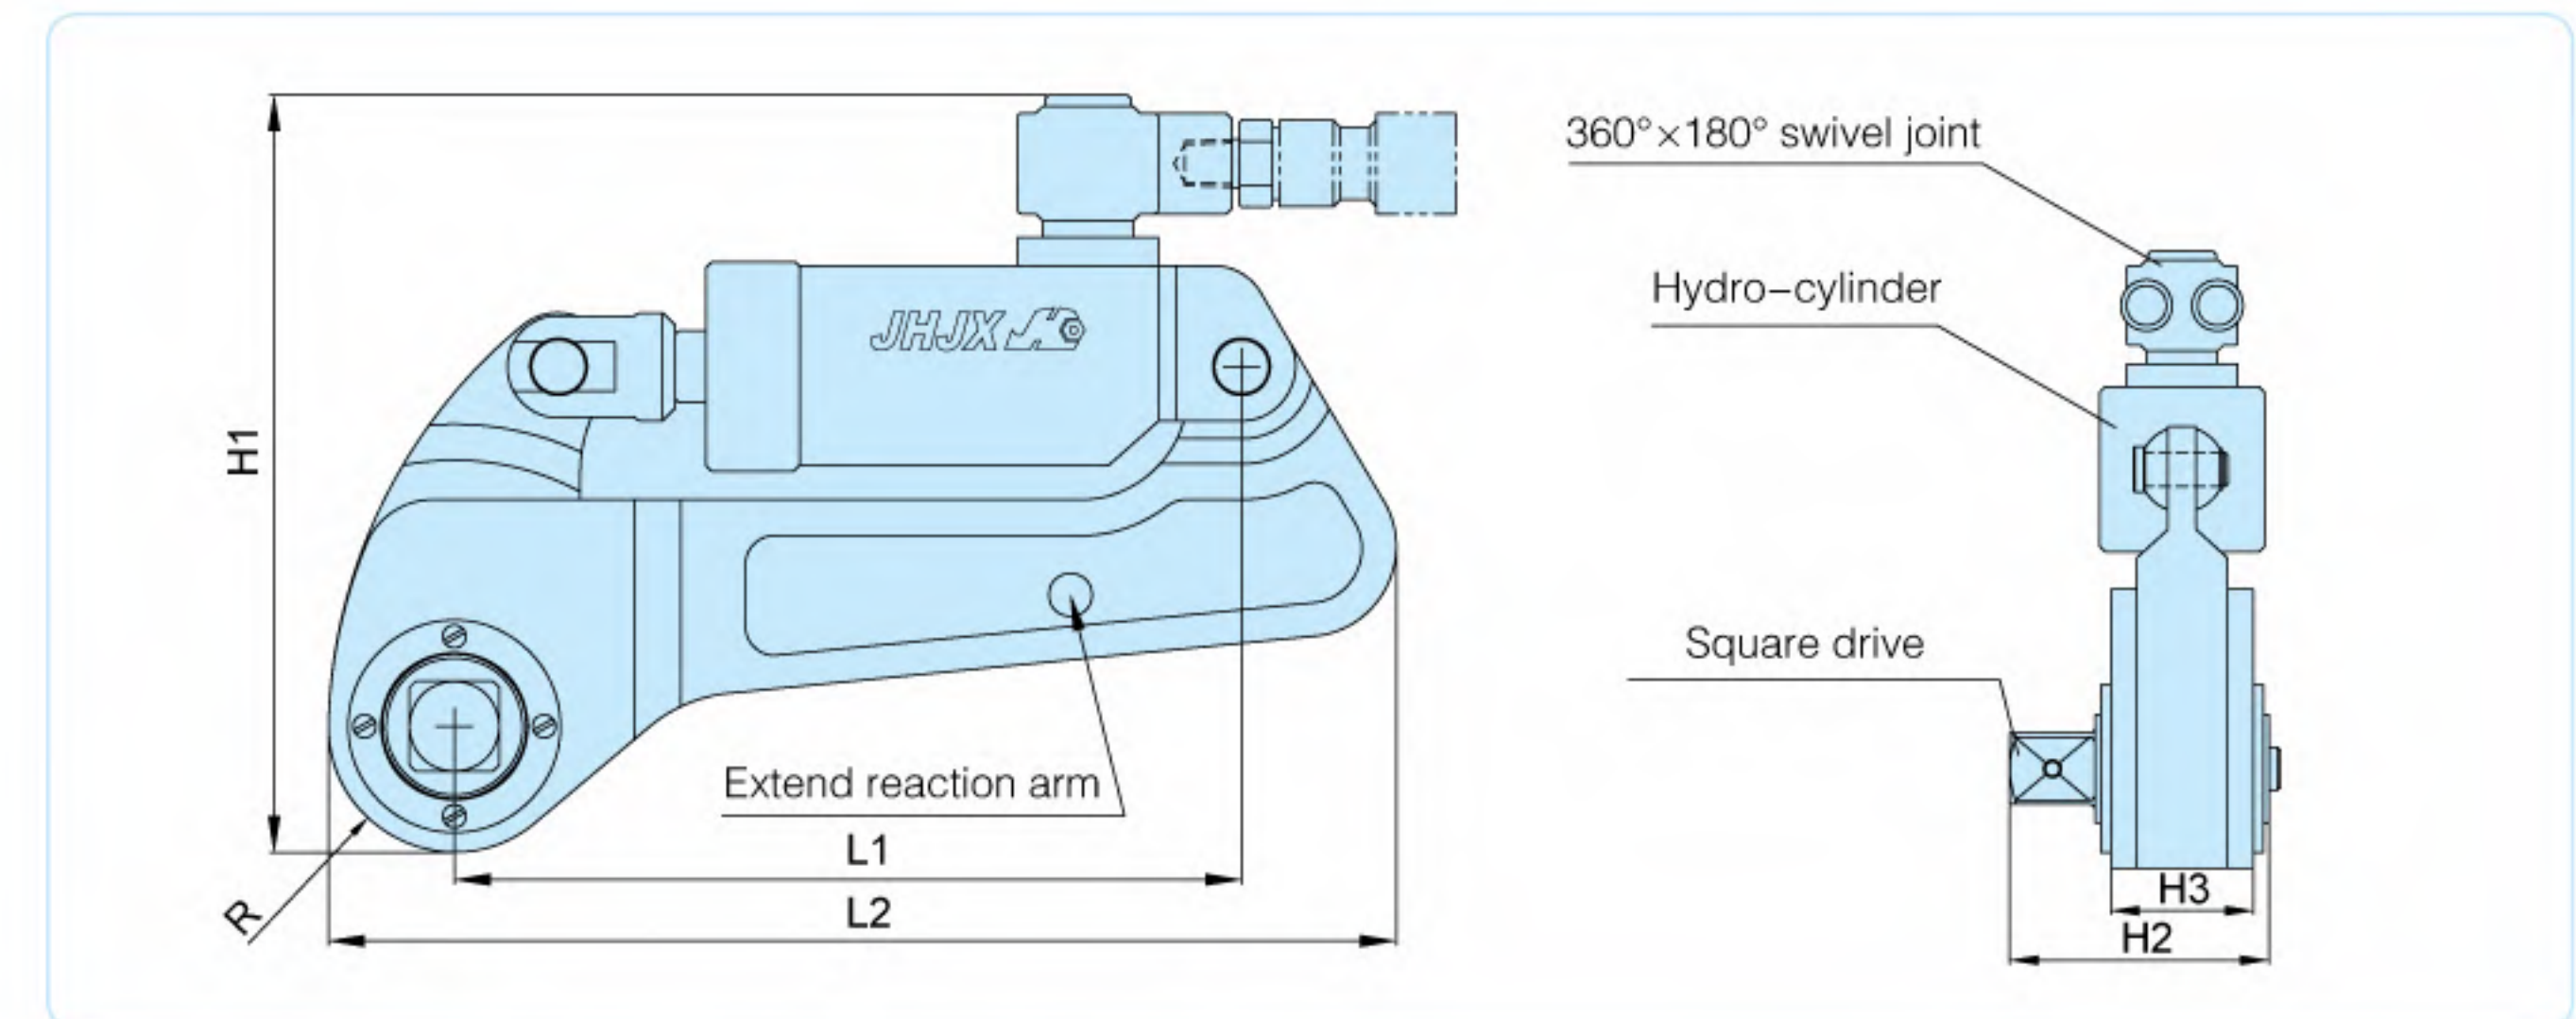

150% **Select The Correct Torque**
 Determine a principle before select a wrench, the loosen torque should be at least 150% as tighten torque.

Data \ Model	JHB05	JHB10	JHB20	JHB40	JHB60	JHB100	JHB120	JHB180
Max torque(Nm)	4992	11775	19413	38100	57488	103670	120323	180677
Min torque(Nm)	499	1178	1941	3810	5749	10367	12032	18068
Drive size	1"	1-1/2"	2"	2-1/2"	2-1/2"	3-1/4"	3-1/2"	4"
L1(mm)	211	256	274	329	370	430	447	505
L2(mm)	289	355	389	473	542	624	655	758
H1(mm)	204	251	285	332	382	430	453	513
H2(mm)	91	125	141	174	179	227	240	270
H3(mm)	50	69	78	96	101	124	132	150
R(mm)	35	45	52	70	80	94	102	124
Weight (Kg)	7	14	19	37	53	91	122	175

- Can customize a variety of driving shaft, the driving wheel and the arm of force. In order to correctly choose the hydraulic models, please contact JHJX engineers.