

Stephan Dahlmann

Mechanic und Antriebstechnik GmbH

Yüksek Performanslı Elektrikli Tork Pompaları

High Performance Electric Driven Torque Pumps



HE Series

FE Series



- » Class 1, kalibrasyonlu Ø 100 mm manometre.
- » 40-800 bar arası basınç sabitleme özelliği.
- » 2-3 kademeli yüksek performanslı pompa.
- » Çoklu tork anahtarları bağlama özelliği.
- » Yağ seviyesi ve hararet göstergesi.
- » Türkiyede yedek parça ve servis desteği.

- » Calibrated, Class 1, Ø 100mm precision gauge.
- » 40-800 bar stepless pressure adjustment available.
- » Multipoint connection for more torque wrenches.
- » 2-3 stage high performance pump units.
- » Oil level indicator - thermometer, protecting frame.
- » Made in Germany, after sales service in Turkey.

| Parça Part | Motor Gücü Power | Debi Deplasmanı Pump Displacement | Debi Flow Rate | Yag Kapasitesi Oil Capacity | Koruyucu Kafes Protecting Frame | Sogutma Sistemi Cooling System | Agırlık Weight | Ölçüler (U-G-Y) Sizes (L-W-H) | Uyumlu Max. Tork |
|---------------|---------------------|--------------------------------------|-------------------|--------------------------------|------------------------------------|-----------------------------------|-------------------|----------------------------------|---------------------|
| No. | kW | # | ltr/dk | ltr | # | # | kg | cm | N.m |
| HE-025-3-230 | 0.25 | 3 kademe / 3 stage | 3.2 - 0.9 - 0.4 | 3 | Var / Available | Yok / NA | 23 | 36 x 30 x 44 | 7.500 |
| HE-055-2-230 | 0.55 | 2 kademe / 2 stage | 5.0 - 0.7 | 5 | Var / Available | Yok / NA | 29 | 45 x 34 x 52 | 12.000 |
| FE-055-3 | 0.55 | 3 kademe / 3 stage | 6.5 - 1.8 - 0.7 | 6 | Var / Available | Var / Available | 30 | 40 x 28 x 40 | 35.000 |
| FE-110-3 | 1.10 | 3 kademe / 3 stage | 8.5 - 3.4 - 1.3 | 6 | Var / Available | Var / Available | 36 | 46 x 30 x 44 | 50.000 |

Stephan Dahlmann

Mechanic und Antriebstechnik GmbH


Yüksek Performanslı Havalı Tork Pompaları

High Performance Air Driven Torque Pumps



4 - 10 Bar

Hava Basıncı / Air Pressure

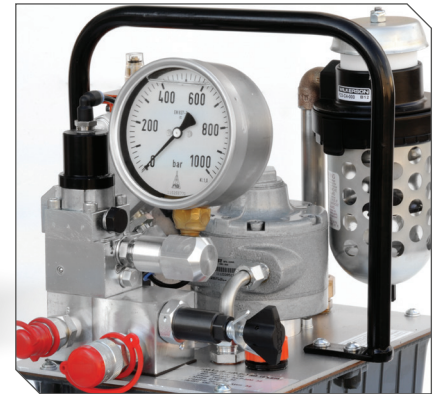

| Model | Motor Gücü Power | Hava Tüketimi Air Consumption | Debi Deplasmanı Pump Displacement | Debi Flow Rate | Yag Kapasitesi Oil Capacity | Koruyucu Kafes Protecting Frame | Sogutma Sistemi Cooling System | Agırlık Weight | Ölçüler (U-G-Y) Sizes (L-W-H) | Uyumlu Max. Tork |
|----------|---------------------|----------------------------------|--------------------------------------|-------------------|--------------------------------|------------------------------------|-----------------------------------|-------------------|----------------------------------|---------------------|
| No. | kW | ltr/dk | # | ltr/dk | ltr | # | # | kg | cm | N.m |
| HP-110-3 | 1.10 | 1.500 | 3 kademe / 3 stage | 4.5 - 1.1 - 0.5 | 6 | Var / Available | Var / Available | 28 | 32 x 31 x 42 | 30.000 |
| FP-280-3 | 2.80 | 2.400 | 3 kademe / 3 stage | 7.5 - 2.5 - 0.9 | 6 | Var / Available | Var / Available | 32 | 50 x 26 x 38 | 50.000 |