


**SURKON**  
INTERNATIONAL

## Hidrolik Yassı Yaprak Kriko [5 - 150 Ton] Low Profile Hydraulic Cylinders

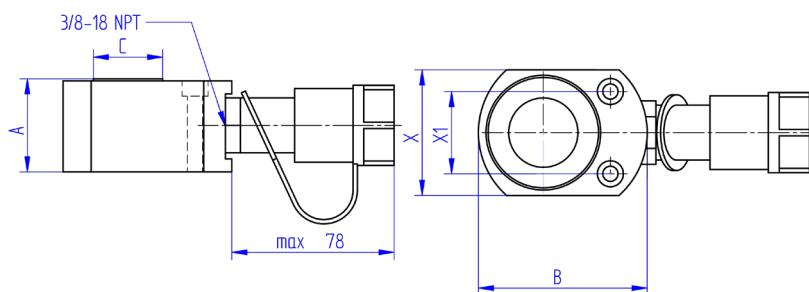

- » Kapasite aralığı 5 – 150 ton
- » Strok boyu 11, 14, 16, 25 mm
- » Ultra yassı, hafif yaprak kriko
- » Tek etkili, yay dönüşlü, 700 bar
- » 3/8" Npt vidalı kaplin donanımlı
- » Ağır çalışma şartlarına uygun yapı
- » Dar bölgeler için ideal kesik tasarım
- » Sabitleme için montaj deliği bulunur
- » Her marka hidrolik pompaya uyumlu
- » Siyah nitrat kaplama paslanmayı öner
- » Yan yük hasarlarına karşı korumalı yapı
- » Teknik destek Surkon tarafından sağlanır

- » Capacity range 5 – 150 tons
- » Stroke range 11, 14, 16, 25 mm
- » Ultra-flat, lightweight pancake design
- » Single-acting, spring return, 700 bar
- » Equipped with 3/8" NPT threaded coupler
- » Built for heavy-duty industrial conditions
- » Compact design for confined spaces
- » Mounting hole for secure installation
- » Compatible with all hydraulic pumps
- » Black nitride for corrosion resistance
- » Protected against side-load damage
- » Technical support by Surkon International

Model	Kapasite Capacity	Strok Stroke	Etki Alanı Effective Area	Yağ Hacmi Oil Capacity	Kapalı Boy (A) Collapsed Height	B	C	X	X1	Ağırlık Weight
#	ton	mm	cm <sup>2</sup>	cm <sup>3</sup>	mm	Ø mm	Ø mm	mm	mm	kg
<b>FZ005006</b>	5	6	7,1	8	40	65	20	41	28,4	0,6
<b>FZ005011</b>	5	11	7,1	12	45	65	20	41	28,4	0,6
<b>FZ010011</b>	10	11	15,9	27	48	78	30	60	37	1,3
<b>FZ020011</b>	20	11	31,2	55	53	106	40	85	50	3,71
<b>FZ030014</b>	30	14	44,2	100	70	118	45	98	55	5,29
<b>FZ030025</b>	30	25	44,2	160	76	118	60	98	55	6,3
<b>FZ050016</b>	50	16	78,5	181	80	148	55	126	75	8,7
<b>FZ075016</b>	80	16	113	283	87	178	70	159	90	14,7
<b>FZ100016</b>	100	16	153,9	392	92	195	90	170	100	18,77
<b>FZ150016</b>	150	16	226,9	626	102	255	110	200	120	28

