


Delikli Piston Hidrolik Kriko [10 - 150 Ton] Hollow Plunger Hydraulic Cylinder



- » Kapasite aralığı 10 ton - 150 ton
- » Strok seçeneği 15mm - 150mm
- » Tonaja göre delik çapı $\varnothing 21 - \varnothing 80\text{mm}$
- » Çalışma basıncı 700 bar maksimum
- » Tek etkili, yay dönüşlü hidrolik sistem
- » Çekme ve itme işlemlerini uygun yapı
- » Dikey veya yatay kullanıma uygun
- » Değiştirilebilir sertleştirilmiş kafa
- » Flanş montajına uygun gövde dışı
- » Vidalı birleştirme kaplin bağlantılı
- » Ağır çalışma şartlarına uygun tasarım
- » Her marka hidrolik pompaya uygun
- » Teknik desteği Surkon karşılar

- » Capacity from 10 tn upto 150 tn,
- » Stroke from 15 mm upto 150 mm
- » Hole diameter from 21mm up to 81mm
- » Maximum operating pressure 700 bar
- » Single acting, spring return hydraulic system
- » Designed for pull and push applications
- » Applicable vertical and horizontal positions
- » Heavy duty return springs, tilting saddles
- » Coller threads, planger threads available
- » Hard-chrome plated plunger with end stop
- » Coupler and dust cap included on all models
- » Wiper seal prevents pollution and corrosion

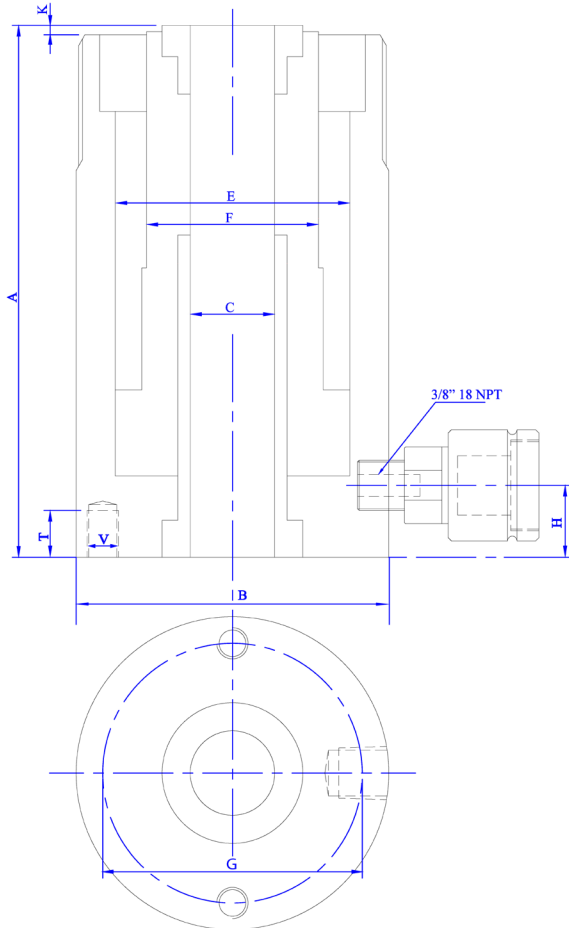

Aksesuarlar / Accessories



Hortum
Hose



Dağıtıcı
Manifold



Manometre
Gauge



El Pompası
Hand Pump

Model	Kapasite Capacity	Strok Stroke	Etki Alanı Effective Area	Yağ Hacmi Oil Capacity	A	B	C	E	F	G	H	Ağırlık Weight
#	ton	mm	cm ²	cm ³	mm	ø mm	ø mm	mm	mm	mm	mm	kg
HKZ010015	12	15	17,6	27	65	78	21	55	40	51	19	2
HKZ010025	12	25	17,6	44	110	78	21	55	40	51	19	3,2
HKZ010040	12	40	17,6	71	130	78	21	55	40	51	19	3,7
HKZ010080	12	80	17,6	141	205	78	21	55	40	51	19	5,8
HKZ010150	12	150	17,6	264	300	78	21	55	40	51	19	8,5
HKZ015015	15	15	22,1	34	65	83	21	66	45	65	19	2,4
HKZ015020	15	20	22,1	45	73	83	21	66	45	65	19	2,6
HKZ020020	24	20	32,3	65	75	95	21	75	51	75	19	3,7
HKZ020050	24	50	34,5	173	170	100	27	75	55	83	23	7,9
HKZ020100	24	100	34,5	346	240	100	27	75	55	83	23	11
HKZ020150	24	150	34,5	518	300	100	27	75	55	83	23	13,6
HKZ030050	30	50	47,7	239	180	120	34	90	68	92	23	12,1
HKZ030100	30	100	47,7	477	265	120	34	90	68	92	23	17,8
HKZ030150	30	150	47,7	716	325	120	34	90	68	92	23	21,5
HKZ040050	40	50	57,27	286	185	135	40	105	78	110	23	16
HKZ040100	40	100	57,27	572	265	135	40	105	78	110	23	16,5
HKZ040150	40	150	57,27	860	325	135	40	105	78	110	23	24
HKZ050050	50	50	71,24	356	210	145	45	115	85	120	28	22,7
HKZ050100	50	100	71,24	713	275	145	45	115	85	120	28	27
HKZ050150	50	150	71,24	1068	325	145	45	115	85	120	28	31,5
HKZ060050	60	50	94,2	471	215	175	56	130	95	130	31	31
HKZ060080	60	75	94,2	707	255	175	56	130	95	130	31	36,4
HKZ060150	60	150	94,2	1413	340	175	56	130	95	130	31	46,8
HKZ080100	80	100	113,1	1130	305	200	73	150	115	170	35	55,1
HKZ080150	80	150	113,1	1696	355	200	73	150	115	170	35	63,5
HKZ100050	104	50	148,4	742	250	225	81	170	130	178	40	57,7
HKZ100100	104	100	148,4	1484	320	225	81	170	130	178	40	72,5
HKZ100150	104	150	148,4	2226	405	225	81	170	130	178	40	85,6
HKZ150050	165	50	235,5	3534	310	265	81	200	130	178	40	115
HKZ150150	165	150	235,5	3534	430	265	81	200	160	220	50	145

