


Lokmalı Hidrolik Tork Anahtarları - [220 - 27.000 N.m]
Square Drive Hydraulics Torque Wrenches - [220 - 27.000 N.m]

- » Torklama hassasiyeti $\pm 3\%$
- » Maksimum kapasite 27.000 N.m
- » Yekpare çelik gövde, 6 farklı model
- » Sıkma ve sökme işlemlerine uygun
- » İnce diş cırcır, geniş torklama açısı
- » Geniş aksesuar seçeneği ile kullanışlı
- » 360° dönebilen yağ girişi bağlantı portu
- » Her iki yöne vidalanabilen tutma kolu
- » Kilitli 360° dönen 2 adet destek ayağı
- » Fabrika kalibrasyon belgesiyle sevk edilir
- » Türkiye'de servis ve kalibrasyon desteği

- » Repeated accuracy $\pm 3\%$
- » Maximum Capacity 27.000 N.m
- » Solid steel body, 6 different models
- » Suitable for tightening and loosening
- » Suitable for Tightening & loosening operations
- » Finely toothed ratchet with a long swing angle
- » Convenient with a different accessories
- » 360° rotatable oil inlet connection port
- » Handle that can be screwed in both directions
- » 360° Adjustable reaction arm with safety lock feature
- » Supplied with a Juwel house calibration certificate

Parça Part	Model Model	Tork Aralığı Torque Range	Sürücü Sq. Drive	Ağırlık Weight	Ölçüler (mm) Dimensions							
No.	No.	N.m	inch (A)	kg	B	C	D	E	F	H	G	R
71 032 000	BL-32	220 - 3000	1"	4.4	140	136	67	101	56	55	65	26
71 052 000	BL-52	320 - 5200	1" + 1.1/2"	5.4	169	150	72	116	56	65	70	32
71 082 000	BL-82	350 - 8000	1.1/2"	7.8	193	195	105	137	59	75	85	46
71 102 000	BL-102	440 - 10000	1.1/2"	7.8	193	195	105	137	59	75	85	46
71 152 000	BL-152	950 - 15200	1.1/2" + 2.1/2"	12.0	224	207	115	166.5	57	90	80	53
71 272 000	BL-272	1500 - 27000	1.1/2" + 2.1/2"	21.0	260	288	155	194	57	115	100	58

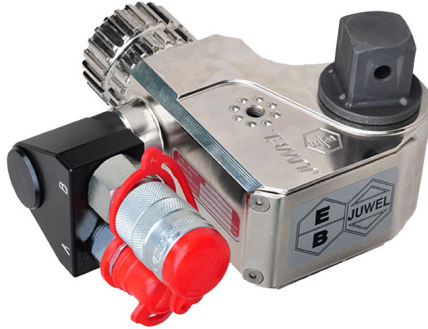