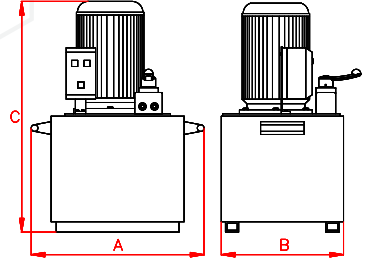


LARZEP
HYDRAULICHBM Serisi Manuel Kontrollü Elektrikli Hidrolik Güç Üniteleri
HBM Hydraulic Powerpack with Manual Valve

- » 700 bar çalışma basıncında farklı debi seçenekleri.
- » 2.5 ile 100 litre arasında 7 farklı yağ tank kapasitesi.
- » 115, 230 ve 380 Volt, 50-60 Hz elektrik motoru seçenekleri.
- » Emniyet valfi sayesinde basınç 700 bar üzerine çıkamaz.
- » Tek etkili veya çift etkili krika uygulamalarına kullanılabilir.
- » Harici valfiyle kademesiz 0-700 bar arası basınç ayar özelliği.
- » Radyal pistonlu çift hızlı dinamik pompa ile donatılmıştır.

- » Manual directional control valves.
- » Also available HBE model, push button controlled solenoid valves.
- » The manual control valve is easily converted from double to single acting operation.
- » Internal safety valve set at 700 bar to prevent overpressure.
- » External adjustable pressure relief valve.
- » For use with single acting or double acting cylinders.

Opsiyonel Aksesuarlar / Optional Accessories

Motor kontrol kumandası
Remote pendantMotor kontrol pedali
Remote pedalYağ soğutma fanı
Oil cooling fanDijital manometre
Digital gaugeTaşıma arabası
Roll bar

220 Volt Motor / 50 Hz

Model		Yağ Kapasitesi Oil Tank	700 Bar da Debi Flow@700 Bar	69 Bar da Debi Flow@69 Bar	Motor Gücü Power	Ağırlık Weight	Ölçüler Sizes
Çift Etkili Double Acting	Tek Etkili Single Acting	Ltr	L/dak	L/dak	kW	Kg	A-B-C (mm)
HBM1241	HBM1221	5	0.36	0.36	0.75	26	280x200x481
HBM7241	HBM7221	5	0.36	4.0	0.75	29	280x200x481
HBM3341	HBM3321	8.5	0.54	5.9	1.1	38	340x247x525
HBM3441	HBM3421	12.5	0.54	5.9	1.1	46	368x290x548
HBM4441	HBM4421	12.5	0.82	8.64	1.1	48	368x290x548

380 Volt Motor / 50-60 Hz

Model		Yağ Kapasitesi Oil Tank	700 Bar da Debi Flow@700 Bar	69 Bar da Debi Flow@69 Bar	Motor Gücü Power	Ağırlık Weight	Ölçüler Sizes
Çift Etkili Double Acting	Tek Etkili Single Acting	Ltr	L/dak	L/dak	kW	Kg	A-B-C (mm)
HBM1144	HBM1124	2.5	0.36	0.36	0.56	16	220x160x400
HBM7244	HBM7224	5	0.36	4.0	0.75	21	280x200x481
HBM3344	HBM3324	8.5	0.54	5.9	1.1	30	340x247x525
HBM3444	HBM3424	12.5	0.54	5.9	1.1	38	368x290x548
HBM4444	HBM4424	12.5	0.82	8.64	1.1	40	368x290x548
HBM5544	HBM5524	25	1.64	14	2.2	78	450x325x667
HBM6544	HBM6524	25	3.28	11.77	5.5	90	450x325x667
HBM5644	HBM5624	50	1.64	14	2.2	130	540x415x752
HBM6644	HBM6624	50	3.28	11.77	5.5	160	540x415x752
HBM6744	HBM6724	100	3.28	11.77	5.5	240	830x500x837