




## Crowfoot Değiştirilebilir Açık Yıldız Uçlar - [10 - 46 mm]

Crowfoot Open Ring End Inserts - [10 - 46 mm]

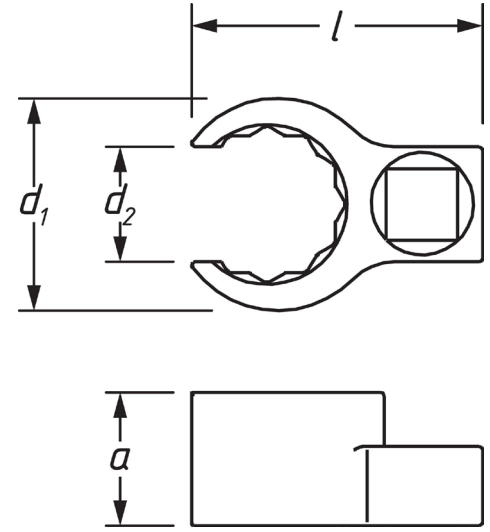

Parça Part	Anahtar Ağız A/F Size	Tahrik Sürücüsü Female Drive	Max. Kapasitesi Rec. Torque	Ölçüler(mm) Dimensions				Ağırlık Weight
No.	N.m	inç	N.m	L	d1	d2	a	kg
848 Z-10	10	1/4"	25	31.1	19	7	17	0.03
848 Z-11	11	1/4"	33	30.2	19.5	8.7	17	0.03
848 Z-12	12	1/4"	42	31.6	21	9.5	17	0.03
848 Z-13	13	1/4"	52	31.9	22	10.5	17	0.03
848 Z-14	14	1/4"	64	32.2	23	11.5	17	0.03
848 Z-15	15	3/8"	93	38.7	24	12.6	17	0.03
848 Z-16	16	3/8"	110	40.4	26	13.5	23	0.05
848 Z-17	17	3/8"	130	40.9	27.5	14.5	23	0.05
848 Z-18	18	3/8"	150	41.7	29	15	23	0.05
848 Z-19	19	3/8"	198	41.9	30	16	23	0.05
848 Z-21	21	3/8"	225	46	32	16.5	23	0.07
848 Z-22	22	3/8"	225	46.5	33.5	17.5	23	0.07
848 Z-24	24	3/8"	225	50	36.5	18.5	23	0.08
848 Z-27	27	3/8"	230	53.7	40.5	20.5	23	0.1
848 Z-30	30	1/2"	245	62.4	46.5	25	23	0.15
848 Z-32	32	1/2"	265	63.7	48.5	24.5	23	0.16
848 Z-36	36	1/2"	285	67.1	52.5	27.5	23	0.17
848 Z-41	41	1/2"	295	74.1	58.5	31	23	0.2
848 Z-46	46	1/2"	320	77.7	64.5	35.5	23	0.24

